

# Product Data Sheet

## RhinoStop® Elite

Last Updated: October 2023



Containment Classification	Type G as per AS/NZS 1170.1, Clause 3.8
Containment Requirement	40kN, acting 1.0m above floor level
Demonstrated Containment	2000 kg pick-up truck, travelling at 20 km/h, impacting at 90°
Standard Post Spacing	2.3 m centres
Minimum Number of Posts	3 off
Containment Classification	Type F as per AS/NZS 1170.1, Clause 3.8
Containment Requirement	30kN, acting 0.5m above floor level
Demonstrated Containment	1500 kg passenger car, travelling at 15 km/h, impacting at 90°
Standard Post Spacing	2.0 m centres
Minimum Number of Posts	2 off
System Height	1100 mm or 1300 mm
System Width	120 mm
System Finish	All steel construction
Gap Between Balusters	97 mm
Anchors per Post	2 off M20
Minimum Slab Thickness	150 mm




# Product Data Sheet

## RhinoStop® Elite



**RhinoStop® Elite Type 1**  
1100mm

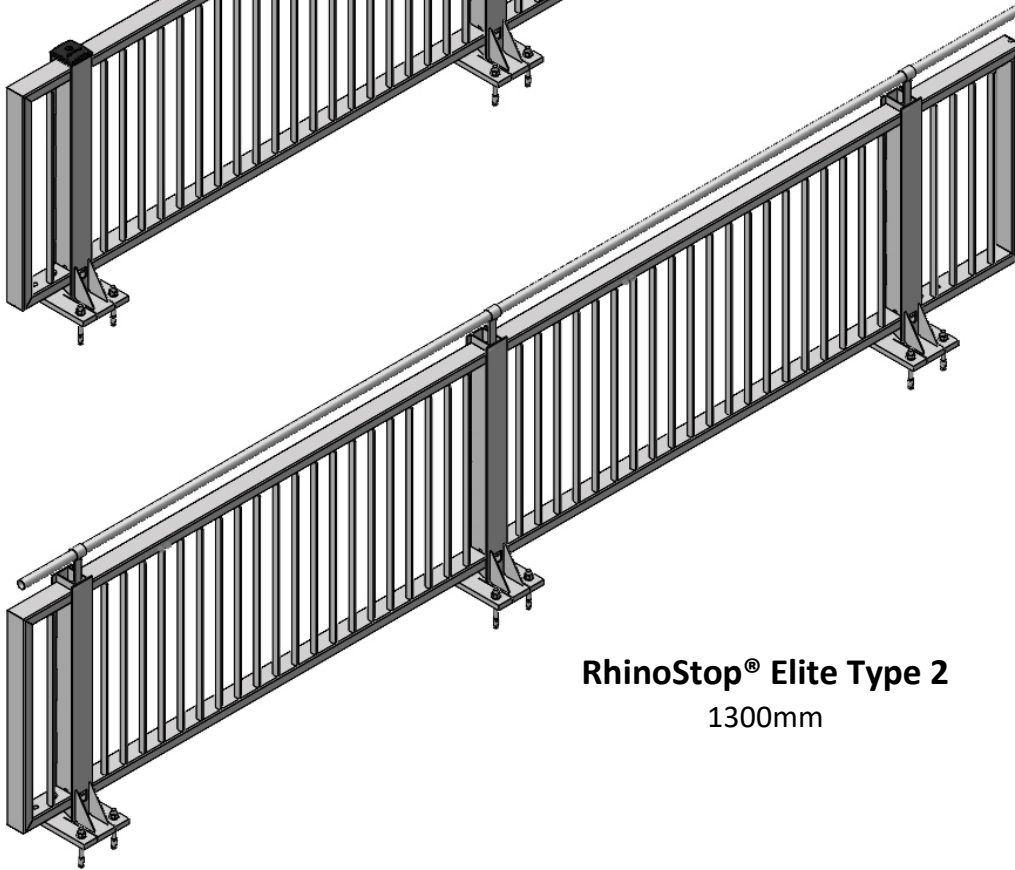

**RhinoStop® Elite Type 2**  
1300mm