

# Product Data Sheet

## RhinoStop® Screen

Last Updated: October 2023




Containment Classification	Type F as per AS/NZS 1170.1, Clause 3.8
Containment Requirement	30kN, acting 0.5m above floor level
Demonstrated Containment	1500 kg passenger car, travelling at 15 km/h, impacting at 90°
Standard Post Spacing	2.0 m centres
Minimum Number of Posts	3 off
System Height	1300 mm to 2500 mm
System Width	160 mm
System Finish	All steel construction
Anchors per Post	2 off M20 for system height to 1500 mm 4 off M20 for system height 1900 mm to 2500 mm
Minimum Slab Thickness	150 mm




# Product Data Sheet

## RhinoStop® Screen



**Type 1**  
1300mm



**Type 2**  
1500mm



**Type 3**  
1900mm




**Type 4**  
2200mm



**Type 5**  
2500mm

### Type 1 & 2 Post

Baseplate  
250 mm x 260 mm

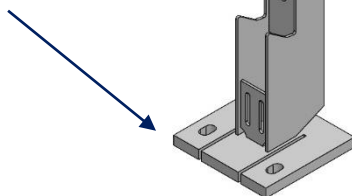

### Type 3, 4 & 5 Post

Baseplate  
260 mm x 270 mm

